


# VANSEAL SINK INSTALLATION CLAMP INSTRUCTIONS AND FEATURES

## 1 ASSEMBLE CLAMP

The Vanseal kit includes the following parts that are easily assembled as shown.


- A. Horizontal Bar
- B. Threaded Rod
- C. 2-1/2" Tapped Spin Clamp
- D. 5" Tapped Spin Clamp
- E. (2) each Washers
- F. (2) each Lock Nuts

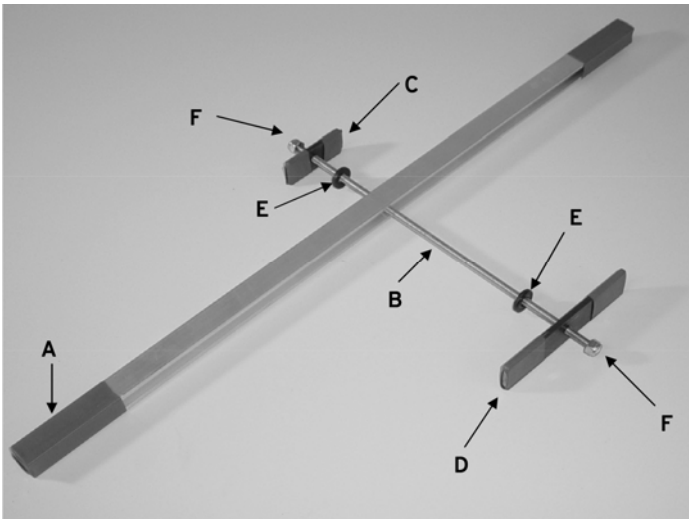

## 3 SECURE THE SINK TO COUNTER TOP

Both clamps may be used to quickly secure the sink to the counter top while mounting hardware is attached and silicone sets. Tighten the spin clamp until the sink is securely held in place.

**CAUTION:** The Vanseal Clamp is capable of generating a significant amount of torque and overtightening may cause damage to the sink and/or counter top.

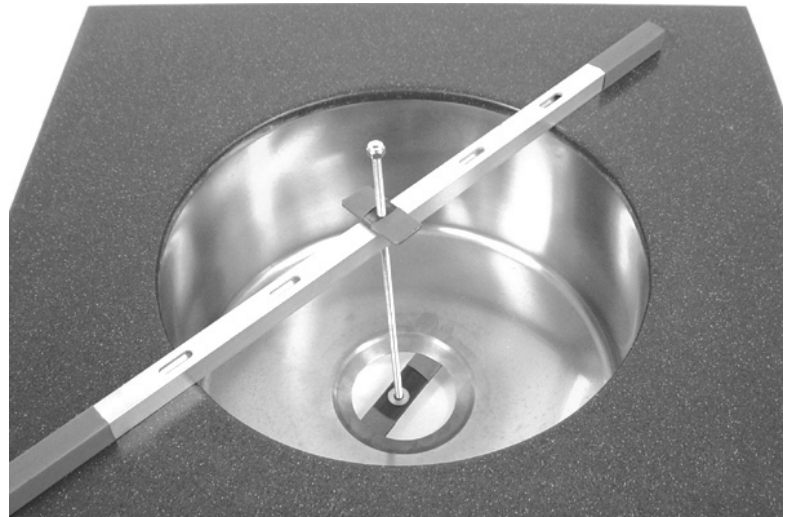

## 2 INSERT SPIN CLAMP THROUGH SINK DRAIN

The Vanseal Sink Installation Clamp includes a 5" tapped spin clamp that is designed to fit through a standard 3-1/2" drain opening and a 2-1/2" tapped spin clamp to fit the smaller lavatory sink drain.

## 4 REMOVE AND RE-USE

After glue has set, remove. The Vanseal Clamp can be used over and over again.

**NOTE:** Two clamps are recommended for double bowl sink installations.

### ADVANTAGES OF INSTALLING A SINK WITH THE VANSEAL CLAMP

- The Vanseal Clamp can be tightened from either side -- whether sink is clamped in place while inverted in the shop or installed in an existing counter top.
- Everything you need is included - NO 2X4s required



**VANCE INDUSTRIES, INC.** 5617 West Howard Street • Niles, IL 60714

Phone: (847) 983-0960 • Fax: (847) 983-0992 • E-mail: sales@vanceind.com • Website: www.vanceind.com